


ITEM NO. QTY.		PART/DRAWING NO.	DESCRIPTION	MATERIAL		
1 1		SP18120704A	55-06200-00-1HDLPTGSP	MISC.		
2	1	06202-44-08	Ø6.00 X 2.00 ET85 TWERGO WHEEL	MISC.		
3	1	AX085400	1/2-20 X 3-3/8 SOLID AXLE ZINC	AISI 1038		
4	4 1 LN08200		1/2-20 TOP LOCK NUT	AISI 1038		

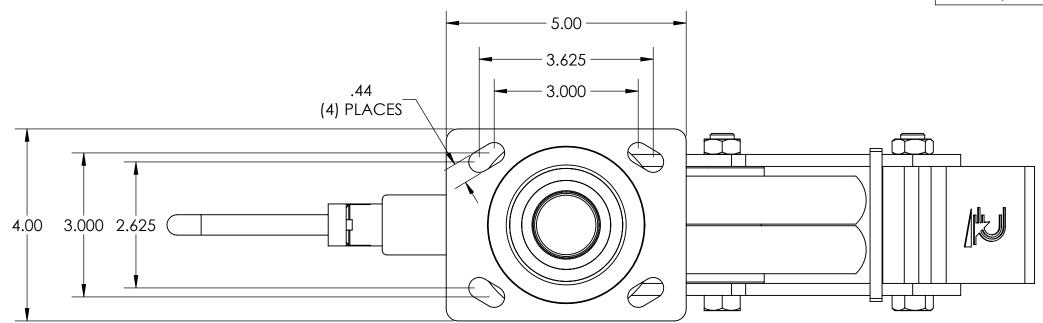

NOTES:

- 1. CASTER IS RATED AS 910 LBS @ WALKING SPEEDS, INTERMITTENT USE.
- 2. AT 910 LBS OF THE LOAD THERE WILL BE A CALCULATED FLOOR LOAD OF 812 PSI.
- 3. ESTIMATED COF OF ROLLING RESISTANCE IS 3% OF LOAD TO START MOVING AND 1% OF LOAD TO MAINTAIN. (THIS IS FIGURING 2 SWIVEL AND 2 RIGID CASTERS ON SMOOTH, FLAT CONCRETE) APPLICATION AND FLOOR CONDITIONS WILL IMPACT THIS.
- 4. CASTER WEIGHT: 13.26LBS

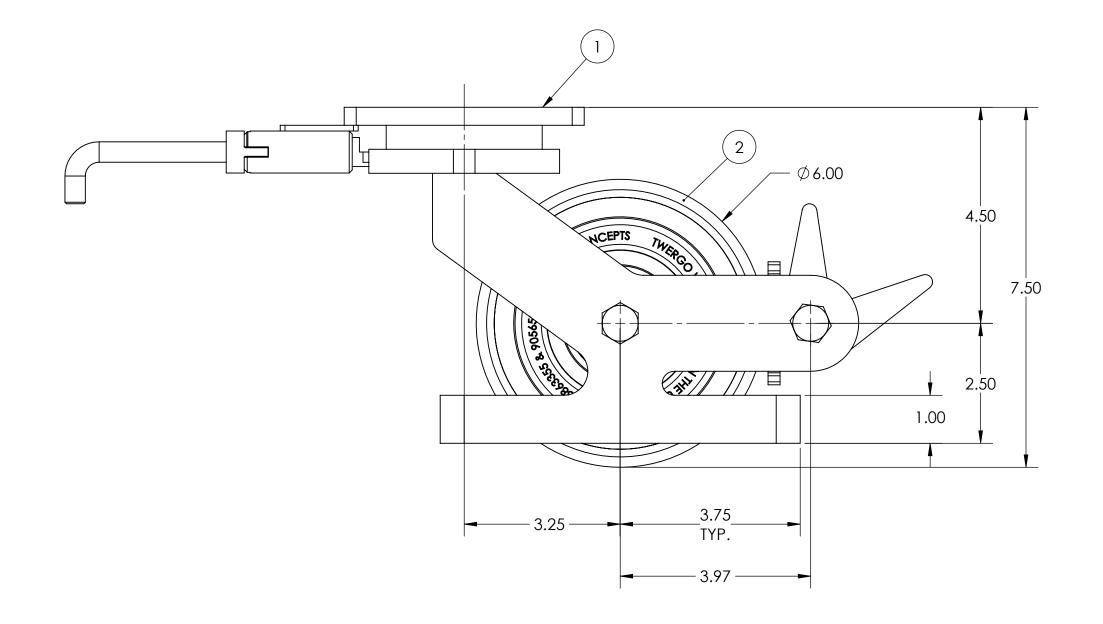

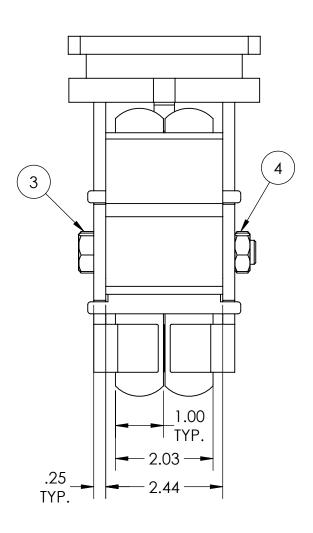

CASTER 16000 E. M	ICHIGAN AVE. 1 49224 TOLERANCE SPECS	UNLESS OTHERWISE SPECIFIED THE FOLLOWING TOLERANCES APPLY: $.XX = \pm .030$ $.XXX = \pm .010$ $X^{\circ} = \pm 1.0^{\circ}$ PART TO BE FREE OF BURRS AND SHARP EDGES		DESCRIPTION: 55-06202-44-1HDLPTGSP				
((CONCEPTS, INC. (517)629-8	838 cepts.com			PART/DRAWING	NO: SP18120704HDLPTG	DATE:	4/2/2019	9
WHERE USED:	FINISH SPECS.	ZINC PLATING ON RIG				SCALE:	1:2	C-SIZE
CHECKED BY: NEKIBUR R.	MATERIAL SPECS.	APPROVED BY:	DR	RAWN BY	ARUN S.	THIRD ANGLE		(